




# H48-2K

## Thermal Conductive Pad

Version 2.130218

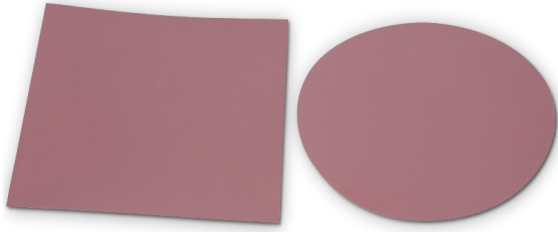

### Thermal Conductive Pad

H48-2K is an ultra thin, silicon based gap filler which is designed for applications which require a high dielectric breakdown voltage combined with ultra low silicone outgassing. H48-2K is available in various formats such as standard sheets or custom die cuts to support both prototyping and high volume manufacturing.

### Features

- Good thermal conductivity
- Ultra-soft and high compressibility
- Natural tack
- Easy to assemble
- Good insulator
- Shock and vibration absorber

### Applications


Electronic components: IC, CPU, MOS  
 LED, M/B, P/S, Heat Sink  
 LCD, TV, Notebook PC, PC Telecom Device, Wireless Hub, etc.  
 DDR II Module, DVD Applications, Hand-set applications, etc.

### Properties

- ✓ REACH Compliant
- ✓ ROHS Compliant

Property	H48-2K	Unit	Tolerance	Test Method
Colour	Dark Red	-	-	Visual
Thickness	0.1/0.2/0.3	mm	-	-
	0.004/0.008/0.01	inch	-	-
Optimal Temperature Range	-45 to 200	°C	-	-
Density	2.4	g/cm <sup>3</sup>	±0.2	ASTM D792
Thermal Conductivity	2.2	W/mK	±0.2	ASTM D5470
Flammability Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	1.2/2.5/3.5	kV/mm	±0.1/±0.2/±0.3	ASTM D149
Hardness	85	Shore A	±5	ASTM D2240
Volume Resistance	>10 <sup>11</sup>	Ohm-m	-	ASTM D257
Elongation	50	%	-	ASTM D412
Shelf Life	36	months	-	-
Shelf Life with adhesive (can be requalified for a further 12)	12	months	-	-

### Thermal Impedance vs Pressure vs Deflection

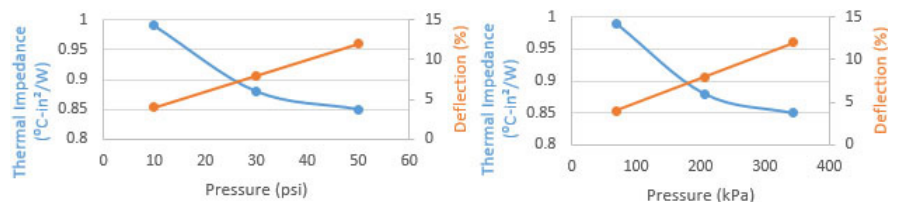

T-Global Technology Limited  
 1 & 2 Cosford Business Park, Central Park,  
 Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510  
 Email: sales@tglobaltechnology.com  
 Web: www.tglobaltechnology.com  
 Skype: tglobal.technology  
 VAT #: GB 116 662 714




# H48-2K

## Thermal Conductive Pad

### Standard Weights & Dimensional Tolerance

Size	Weights (g)			
	Thickness (mm)	0.10	0.20	0.30
100x100		2.10	4.20	6.30
150x150		4.73	9.45	14.18
300x300		18.90	37.80	56.70
320x320		21.50	43.01	64.51

### Data

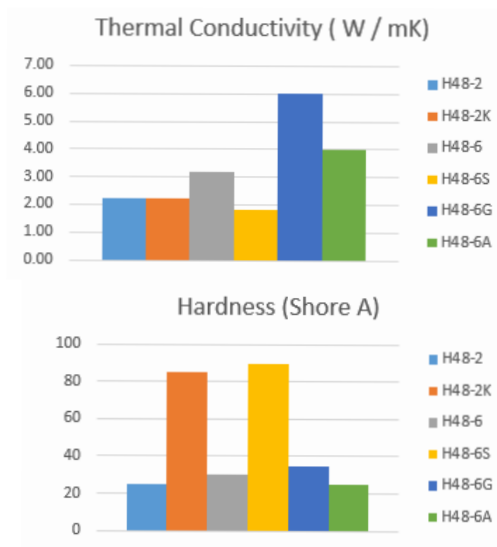

Die-Cut Thickness Tolerances	Thickness (mm)	Tolerance (mm)
	0.3	±0.03
	0.5	±0.05
	0.8	±0.08
	1.0	±0.1
	1.2	±0.12
	1.5	±0.15
	2.0	±0.2
	2.5 - 3.5	±0.25
	4.0 - 4.5	±0.3
	5.0	±0.35
	6.0 - 8.0	±0.4
	9.0	±0.45
10.0	±0.5	
>10.0	±0.5	

\* Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

**NOTICE:** The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.