




TGJGR40

Thermal Flexible Graphite Sheet

Version 2.090218

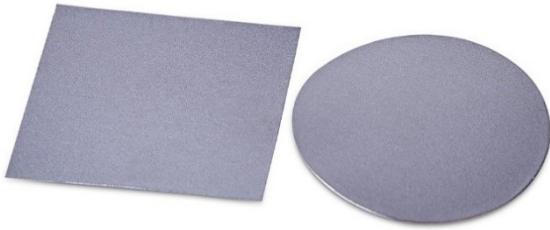

Thermal Flexible Graphite Sheet

TGJGR40 is a flexible graphite sheet made from pure graphite with no fibers, binders or other additives. Flexible graphite gaskets offer excellent sealing capabilities under extreme conditions. Due to its versatility and flexibility, TGJGR40 is becoming the most popular fluid sealing material in use today. It is extensively used in the chemical, automotive and pump and valve industries.

Features

- Asbestos-free and contains no fibers, binders or additives
- Impermeable to gases and liquids
- Suitable for service over a wide range of pressures and temperatures
- Resists thermal shock
- Excellent sealability
- Does not age, shrink or harden
- Seals easily under low to moderate bolt loads
- Highly chemical resistant

Applications

- Automotive sealing
- Thermal and electromechanical applications
- Heat and chemical resistant gaskets

Properties

- ✓ REACH Compliant
- ✓ ROHS Compliant

Property		TGJGR40	Unit	Tolerance	Test Method
Thickness		0.04	mm	± 10%	-
Thermal Conductivity	Horizontal axis	1100 ~ 1300	W/mK	-	ASTM D5470
	Vertical axis	15	W/mK	-	ASTM D5470
Thermal Diffusivity		9 - 10	cm/s	-	ASTM E1461
Density		1.9	g/cm ³	-	ASTM D4052
Specific Heat		0.85	J/gK	-	ASTM E1269
Heat Deformation Temperature		400	°C	-	ASTM D648
Tensile Strength	Horizontal axis	28	MPa	-	ASTM D412
	Vertical axis	0.4	MPa	-	ASTM D412
Flexural Strength		10,000 or more	R5/180 times	-	ASTM C1161
Electrical Conductivity		20,000	S/cm	-	ASTM E1004
Shelf Life		36	months	-	-

T-Global Technology Limited
1 & 2 Cosford Business Park, Central Park,
Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510
Email: sales@tglobaltechnology.com
Web: www.tglobaltechnology.com
Skype: tglobal.technology
VAT #: GB 116 662 714

NOTICE: The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated in T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and all liabilities incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing or future patents covering any product or material or its use.