




# PT 1776

## CONSTRUCTION, HOT MELT ADHESIVE

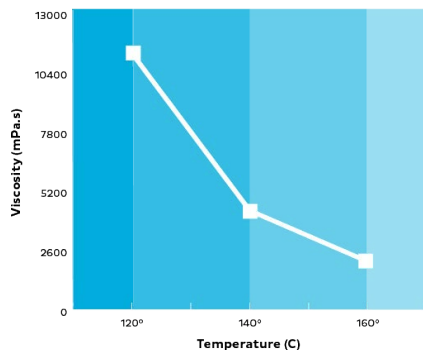

### VISCOSITY CURVE

#### TEMPERATURE

120°C  
140°C  
160°C

#### VISCOSITY

11250 cPs  
4330 cPs  
2090 cPs

### ADDITIONAL INFORMATION:

#### Technology

Styrenic Block Copolymer

#### Suggested Use

Construction adhesive

#### Adhesive Changeover

For adhesive changeover guidelines, contact Bostik Technical Service.

#### Product Shelf Life

2 years

#### Last Updated

January 2022

#### Storage

Store product under normal warehouse conditions

#### Safety and Handling

Product is safe to use under normal application conditions. Safety precautions, including Personal Protective Equipment use, should be implemented as per product SDS.

### A DEDICATED BOSTIK TEAM WHERE YOU NEED IT

#### United States

Wauwatosa, WI  
+1 414 774 2250

#### Argentina

Buenos Aires  
+54 11 4784 6464

#### Brazil

Sao Paulo  
+55 11 3622 1979

#### China

Shanghai  
+86 21 60763100

#### Egypt

Cairo  
+20 2 3828 9100

#### India

Bangalore  
+91 80 27833520

#### Japan

Osaka  
+81 729 48 8286

#### Mexico

Naucalpan de Juarez  
+52 55 21 22 72 50

#### The Netherlands

Roosendaal  
+31 165 590 590

### TECHNICAL PROPERTIES

<b>Product Number</b>	PT 1776
<b>Density</b>	.99 g/cc @ room temperature
<b>Softening Point Ring and Ball (Herzog – ASTM E28)</b>	80°C
<b>Suggested Running Temperature</b>	140 – 160°C
<b>Appearance</b>	Translucent
<b>Color</b>	White

For performance test characteristics, please contact Bostik Technical Service.

The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use under the conditions that will exist at the time of the intended use. Bostik does not warrant the product's suitability for any particular application.

The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale. The sole warranty that applies to this product is the limited warranty ("Limited Warranty") set forth in those Terms and Conditions of Sale. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTIES THAT COULD ARISE FROM COURSE OF DEALING OR USAGE OF TRADE. UNLESS OTHERWISE STATED IN THE TERMS AND CONDITIONS, THE EXCLUSIVE REMEDY FOR BREACH OF WARRANTY IS REPAIR OR REPLACEMENT OF THE AFFECTED PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE OF THE AFFECTED PRODUCT. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES.

BUYERS AND USERS ASSUME ALL RESPONSIBILITY AND LIABILITY FOR LOSS OR DAMAGE ARISING FROM THE HANDLING AND USE OF BOSTIK'S PRODUCTS. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

### Bostik

an Arkema Company  
[www.bostik.com](http://www.bostik.com)