


## VieTape AM9001

### LABEL TAPE

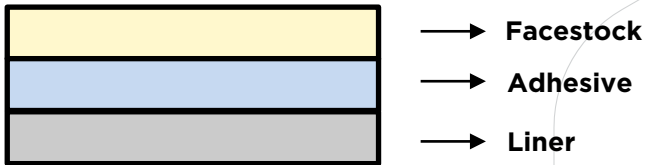

### PERFORMANCE FEATURES

Physical Properties	Values
<b>FACESTOCK</b>	
Type	Matte white polypropylene film
Basic Weight	45 ± 3g/m <sup>2</sup>
Caliper	54 ± 3µm
GENERAL CHARACTERISTICS: Suitable for traditional, but UV inks are recommended. Testing for suitability between media, printers and inks is always recommended prior to use. Designed for high quality multicolor labels and stickers with high flexibility conformity requirements. It is advisable to test the product with the end-use conditions during the qualification to ensure it meets specific requirements.	
<b>ADHESIVE</b>	
Type	Emulsion acrylic adhesive
Initial Tack Glass	≥8N/25mm
Adhesion to Stainless Steel	≥10N/25mm
Thickness	18 ± 2µm
Minimum Application Temperature	10°C
Service Temperature	-20°C to 80°C subject to facestock limitations

Issue date: September 2022

VIETAPE MATERIAL TECHNOLOGY CO., LTD

18F Tang Nhon Phu Street, Phuoc Long B District,  
 Thu Duc City, Ho Chi Minh City, Vietnam

[info@vietape.com](mailto:info@vietape.com)  
 (+84) 869 681639

[www.vietape.com](http://www.vietape.com)



FDA Compliant : US FDA 21 CFR 175.105 (Adhesive) for indirect food contact packaging & processing.

Shelf Life : 1 years if store in 23°C and 50% RH condition. The product must be stored in shady or cool place and not be exposed to sunlight directly.

## LINER

Type	White art kraft paper
Basic Weight	140 ± 5g/m <sup>2</sup>
Caliper	160 ± 10µm
Color	White

## GENERAL CHARACTERISTICS:

High density and good transparency.

Excellent resistance in die-cut pressure.

All product properties are measured in accordance with Pressure Sensitive Tape Council and/or ASTM test methods. The physical properties listed above are typical values and are not to be construed as specifications. Our suggestions and recommendations for use are based on tests we believe to be reliable. However, the purchaser must determine the suitability of the product for his intended use. We assume no liability for claims beyond the replacement value of our product proved to be defective. Note: Tape should be stored in its original packaging in a cool, dry area (60 F to 80 F and 50% relative humidity) away from direct sunlight. Tape should be used within 12 months from the date of shipment. Application surfaces should be clean, dry and free of grease, oil or other contaminants.

*Issue date: September 2022*

**VIETAPE MATERIAL TECHNOLOGY CO., LTD**

18F Tang Nhon Phu Street, Phuoc Long B District,  
Thu Duc City, Ho Chi Minh City, Vietnam

[info@vietape.com](mailto:info@vietape.com)  
(+84) 869 681639

[www.vietape.com](http://www.vietape.com)

