


## VieTape SE3601-L

Polyester Tape with Liner

The polyester film coated with one side silicone - adhesive and with release liner, suitable for high temperature masking spray protection

### PRODUCT FEATURES

- Strong adhesion.
- High temperature resistance.
- Chemical resistance, good insulation properties.
- No Adhesive residue when removed.

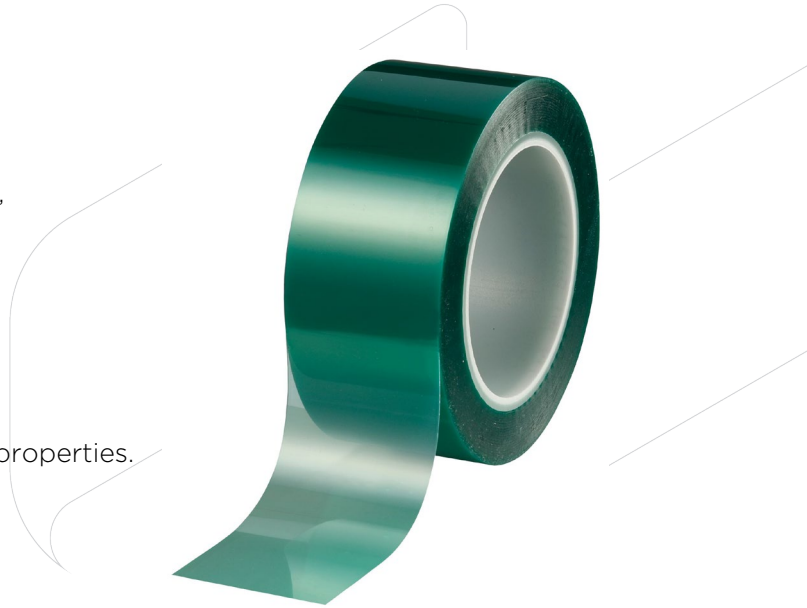

### PERFORMANCE FEATURES

Physical Properties	Values	Testing Method
Color	Green	Sight-seeing
Backing Thickness	50 $\mu\text{m}$	ASTM D-3652
Total Thickness	80 $\mu\text{m}$	ASTM D-3652
Liner Thickness	50 $\mu\text{m}$	ASTM D-3652
Adhesion to Steel	9 N/25mm	ASTM D-3330
Tensile Strength	$\geq 210$ MPa (MD) $\geq 250$ MPa (TD)	ASTM D-3759
Elongation	$\geq 190\%$ (MD) $\geq 130\%$ (MD)	ASTM D-3759
Backing	Polyester Film	
Adhesive System	Silicone	

All product properties are measured in accordance with Pressure Sensitive Tape Council and/or ASTM test methods. The physical properties listed above are typical values and are not to be construed as specifications. Our suggestions and recommendations for use are based on tests we believe to be reliable. However, the purchaser must determine the suitability of the product for his intended use. We assume no liability for claims beyond the replacement value of our product proved to be defective. Note: Tape should be stored in its original packaging in a cool, dry area (70 F and 50% relative humidity) away from direct sunlight. Tape should be used within 12 months from the date of shipment. Application surfaces should be clean, dry and free of grease, oil or other contaminants.

