

VieTape TBP3601

PET TAPE


DESCRIPTION

PET film with different, coated with the special removable and good heat resistant solvent type pressure sensitive adhesive (PSA), having release paper liner.

APPLICATION

Electrical, electronic home appliances, packaging industries, ...

STRUCTURE

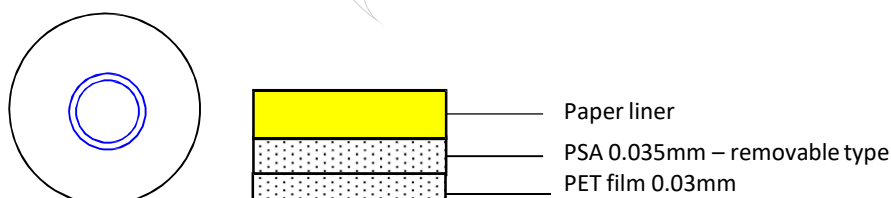

FEATURES

Item	Method	Unit	Value
Adhesive strength (180°)	ASTM3330	Kgf/in ~25mm	> 0.8
Adhesive holding power	ASTM3654D	25mm/1kg/80°C	> 2 hours
Adhesive heat resistance (30 minutes)	ASTM3654D	25mm/1kg/130°C	Pass
Film thermal shrinkage (150°C 30 minutes)	ASTM1204D	%	MD 1.6 / TD 0.2
Film tensile strength	ASTM882D	Kg/cm ² (kpsi)	MD 2100 / TD 2200
Film elongation at break	ASTM882D	%	MD 140 / TD 130

SHELF LIFE

6 months from date of manufactured when stored at 21°C to 38°C and 55% relative humidity.

IMPORTANT NOTICE

The above values are sample observed values, not the guarantee performance.

