



L7132K

TWO PART SOLVENT BASED THERMOSET ADHESIVE KIT

KEY FEATURES

- Good adhesion to low surface energy substrates
- Meets BMS 5-127 Type II & III Class 2
- Conveniently packaged for ease of use

DESCRIPTION

Bostik's L7132K is a kit containing L7132R and Boscodur® 24T. L7132K is a two-component adhesive system specifically designed for use in the vacuum form bonding of PVC films to wood, fiberboards, and most porous substrates. Characterized by its high green strength, L7132K permits for edge trimming immediately after removal from the vacuum former.


In addition to securing strong, resilient anchorage to PVC, L7132R displays inherently high adhesion to polyolefin foams, polyester films, most plastic laminating films, foils, sheet metal surfaces, and to cellulose in general. Boscodur 24T is used to ensure the development of heat and creep resistant bonds.

KEY BENEFITS

- Wide processing window that allows for use in a variety of application processes
- Excellent adhesion to vinyl, particle board, polyolefin foams, and plastics
- Cures to a tough, highly heat resistant film

PACKAGING

L7132K is available in one gallon kits. Each kit contains 4, one gallon cans of L7132R and 4 half pint cans of Boscodur 24T.

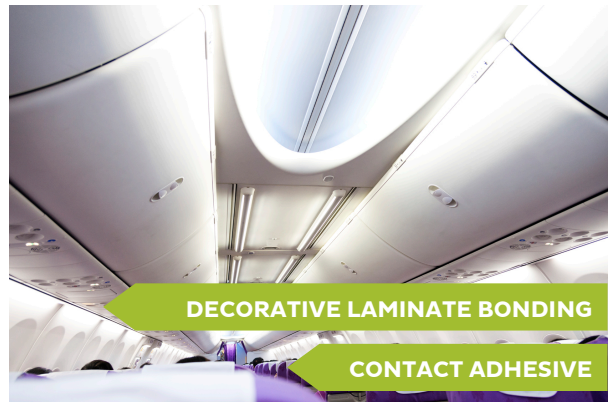

DECORATIVE LAMINATE BONDING

CONTACT ADHESIVE

TYPICAL PHYSICAL PROPERTIES

Description	Results
Kit Component	L7132R
Appearance	Opaque Liquid
Base/Solvent	Linear Saturated Polyester/MEK blend
Total Solids	25.5 %
Viscosity	100 cP
Density @ 25°C	7.67 lb/gal (0.919 g/cm ³)
Flash Point (SCC)	14°F (-10°C)

TYPICAL PHYSICAL PROPERTIES

Description	Results
Kit Component	Boscodur 24T
Appearance	Dark Brown Liquid
Base/Solvent	Polyisocyanate/MEK
Total Solids	68%
Density @ 25°C	8.76 lb/gal (1.05 g/cm ³)
Flash Point (SCC)	29°F (-2°C)

SHELF LIFE

The shelf life of L7132K is six months when stored at 55–80°F (15–27°C) in unopened factory sealed containers. Once the two-part system is blended, it has a pot life of eight hours.

STORAGE & HANDLING

Boscodur 24T should be stored in a sealed container. Once opened it should be nitrogen purged to prevent contamination from moisture in the air. L7132R has a shelf life of at least 9 months if stored in an unopened container. Do not freeze.

BASIC USES

- Aerospace applications to laminate decorative films to aluminum or honeycomb sidewalls in the construction of cabin interiors
- Automotive applications to vacuum form PVC film and polyolefin foam to rigid substrates in the manufacturing of door panels, consoles, dashboards, and other interior trim
- Vacuum forming PVC films to particle boards in the production of decorative furniture facings
- Vacuum form construction of PVC coated luggage shells

MIXING RATIO

Boscodur 24T should be added to L7132R in accordance with the mixing ratio (1:16) and blended to a homogenous solution (solvent dilutions, where applicable, should be made immediately after the Boscodur 24T addition).

APPLICATION TECHNIQUES

Adhesive can be applied via direct roll, reverse roll, gravure, or any coater common to the industry. This adhesive can also be sprayed.

Apply 100–150 g/m² (wet) adhesive to the least porous laminating surface and evaporate the solvent by standard drying techniques. Mate the secondary substrate under pressure at 110–212°F (41–100°C).

To cure the part, the adhesive should be held at a minimum of 190°F (88°C) for at least 4 minutes. Vacuum pressure should be held at a minimum of 15 in Hg (51 kPa), 20 in HG (68 kPa) is preferred.

CLEANUP PROCEDURE

Recommended clean up is with a MEK/toluene solution.

HEALTH & SAFETY PRECAUTIONS

L7132K is an extremely flammable system. Before using, extinguish all flames and pilot lights. Use only in well ventilated areas. During application and until vapors are gone, keep product away from heat, sparks, and flame. Avoid using spark-producing equipment such as switches, tools, appliances, etc. Keep container tightly closed when not in use.

The Safety Data Sheet should be consulted for proper handling, clean up and spill containment before use. Keep containers covered to minimize contamination.

LIMITED WARRANTY

Limited Warranty found at www.bostik.com/uso call 800.726.7845. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT PARTICULAR PURPOSE. UNLESS OTHERWISE STATED IN THE LIMITED WARRANTY, THE SOLE REMEDY FOR BREACH OF WARRANTY IS REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW. DISCLAIMERS OF IMPLIED WARRANTIES MAY NOT BE APPLICABLE TO CERTAIN CLASSES OF BUYERS AND SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. The information, data, and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. Bostik does not warrant the product's suitability for any particular application. It is the buyer's obligation to test the suitability of the product for an intended use prior to using it. The Limited Warranty extends only to the original purchaser and is not transferable or assignable. Any claim for a defective product must be filed within 30 days of discovery of a problem, and must be submitted with written proof of purchase.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

BOSTIK HOTLINE

Smart help
1-800-726-7845

Bostik, Inc.
11320 W. Watertown Plank Road
Wauwatosa, WI 53226
www.bostik-us.com



This document supersedes all previously published literature.
10.08.2018