

VieTape FP5303

PU FOAM


DESCRIPTION

FP5303 Polyurethane Foam is used in most general applications.

APPLICATION

General applications: Damping, gasket, insulation

STRUCTURE

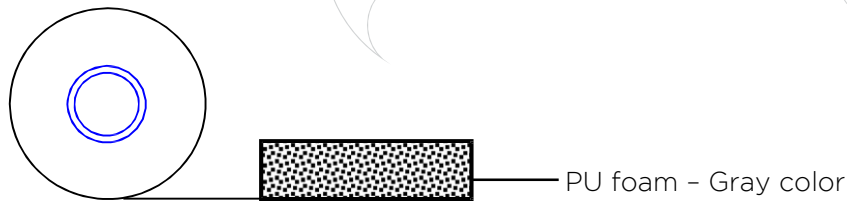

FEATURES

Item	Unit	Parameter	Notes
Color	-	Gray	-
Thickness	mm	Optional	-
Density	kg/m ³	35	JIS-K-6401
Hardness	Asker "F"	75	10mm
Tensile Strength	kgf/cm	1.32	MS257-06
Elongation	%	140	MS257-06
ILD Indentation Load (Force) Deflection	kgf/314cm ³	16	MS257-06
Temperature Resistance	°C	- 40 to 90	-

SHELF LIFE

12 months from date of manufacture when stored at 21°C to 38°C (69°F to 100°F) and 55% relative humidity.

The above values are sample observed values, not the guarantee performance.

Issued date: June 2023

VIETAPE MATERIAL TECHNOLOGY CO., LTD

18F Tang Nhon Phu Street, Phuoc Long B District,
Thu Duc City, Ho Chi Minh City, Vietnam

info@vietape.com
(+84) 869 681639

www.vietape.com

