



BOSTIK

BORN<sup>2</sup>  
BOND™

# MP-515

## TWO-COMPONENTS HIGH PERFORMANCE CYANOACRYLATE

TECHNICAL DATA SHEET

Revised 12/2022



### PRODUCT DESCRIPTION

**Born2Bond™ MP-515** is a two component instant semi-structural adhesive. Its patented technology provides gap filling properties with excellent adhesion to a very broad range of materials and surfaces (including aluminum). Curing time and working time are among 5 and 10 minutes. Born2Bond MP515 has an excellent water heat resistance. The transparent gel consistency enables application in any orientation whilst the static mixing nozzle ensures uniform and precise application for exceptional user convenience.

### KEY FEATURES

- High Strength performance
- Humidity and temperature resistance
- Multi-material adhesion
- Fills gaps up to 5 mm
- Open time 5 minute

### DIRECTIONS FOR USE

1. Before applying Born2Bond™ MP515, make sure the surface is clean, dry and grease-free.
2. To use, Part A and Part B must be blended.
  - Product can be applied directly from the syringe using the plunger supplied and dispensed through the recommended mixing nozzle.
3. Hold the syringe upright and insert the plunger.
  - While keeping the syringe in an upright position, remove the cap, attach the mixing nozzle, and begin dispensing the adhesive upward until any bubbles present in the smaller component have been removed.
4. Dispense and discard a bead as long as the mixing nozzle, to ensure sufficient mixing.

5. Apply the mixed adhesive to one of the bond surfaces to be joined.

- Parts should be assembled immediately after the mixed adhesive has been applied.
- Bonds should be held by fixing or clamping until the adhesive has cured. Prevent assembled parts from moving during cure.
- The bond should be allowed to develop to full strength before being subjected to any service load (typically 24 hours).

### APPLICATIONS

Typical applications for this product are structural bonding, magnet bonding, gap filling, glass bonding, elastomer bonding, plastic bonding, metal bonding.

### STORAGE/SHELF LIFE

Optimal storage: 2°C to 8°C (35.6°F to 46.4°F). Storage below 2°C (35.6°F) or greater than 8°C (46.4°F) can adversely affect the product's properties. If stored properly, this product has a shelf life of 12 months from the packaging date.

### HEALTH/SAFETY

The Safety Data Sheet is available on the Bostik website and should be consulted for proper handling, cleanup and spill containment before use. Keep containers covered to minimize contamination.

### LIMITATIONS

This product is not recommended for use in pure oxygen and/or oxygen-rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials. Material removed from containers may be contaminated during use. Do not return product to the original container. Bostik will not assume responsibility for product that has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or customer service representative.

**BOSTIK****BORN<sup>2</sup>  
BOND™****MP-515**

## PRODUCT CHARACTERISTICS

Base Technology - Part A/B	Ethyl Cyanoacrylate
Components 1k - 2k	2k
Mix Ratio	4:1
Appearance/Color	Whitish
Gap Filling Capacity	5mm (0.2In)
Temperature Use Range	-40°C to 120°C (-40°F to 248°F)
Open Time	5 mins
Mixer Life	5 mins
VOC Content - Part A (ISO 11890-2)	34 g/L
VOC Content - Part B (ISO 11890-2)	2.2 g/L

## UNCURED PHYSICAL PROPERTIES

Viscosity at 25°C (77°F)* - Part A	120000 - 180000 cP @ 1.5 rpm 5000 - 10000 cP @ 50 rpm
Viscosity at 25°C (77°F)* - Part B	40000 - 70000 cP @ 1.5 rpm 1000 - 3000 cP @ 50 rpm
Specific Gravity (ASTM D1875: 23°C / 73.4°F)	1.090 g/mL (A) 1.136 g/mL (B)
Refractive Index, ABBE	1.49 - 1.51

\*based on Brookfield viscometer

## CURED PHYSICAL PROPERTIES

Shore Hardness D (ISO 868-2003)	65
Soft Point - HDT (ASTM E2092-18a)	65.6°C (150°F)
Tensile Strength (ISO 527)	21 MPa
Elastic Modulus (ISO 527)	800 MPa
Elongation at Break (ISO 527)	4%
Glass Transition Temperature (ISO 6721)	111°C (231.8°F)
Coefficient of Linear Thermal Expansion (ISO 10545-8)	80·10 <sup>-6</sup>
Linear Shrinkage (ISO 10563)	9.4%
Water Absorption (after 24 hrs) (ASTM D-542)	1.23%
Impact Resistance (after 24 hrs) (ISO 9653)	5.6 kJ/m <sup>2</sup>
Surface Resistivity DC 500V (IEC 60093 (Ohm)	1.94·10 <sup>14</sup> Ohm
Volume resistivity DC 1kV (IEC 60093)	1.1·10 <sup>13</sup> Ohm.m

Corrected Dissipation Factor, Dielectric Constant IEC 60250

D @ 1 kHz	0.004
k' @ 1 kHz	1.23
D @ 1 MHz	0.010
k' @ 1 MHz	1.20

DC breakdown voltage according to IEC 60243-2 21.85 kV/mm

DC breakdown strength according to IEC 60243-2 15.45 kV/mm

## CONVERSIONS

 $(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$ 

kV/mm x 25.4 = V/mil

mm / 25.4 = in

 $\mu\text{m} / 25.4 = \text{mil}$ 

N x 0.225 = lb

N/mm x 5.71 = lb/in

N/mm<sup>2</sup> x 145 = psi

MPa x 145 = psi

N·m x 8.851 = lb·in

N·mm x 0.142 = oz·in

mPa·s = cP

## FIXTURE TIME

### Fixture Time\* (0.1N/mm<sup>2</sup>)

Stainless Steel (A316)	40 - 70 seconds
Steel (Mild Steel)	10 - 30 seconds
Aluminum (A5754)	10 - 40 seconds
Neoprene	20 - 50 seconds
EPDM	10 - 30 seconds
Rubber, Nitrile	10 - 30 seconds
ABS	10 - 50 seconds
PVC	40 - 90 seconds
Polycarbonate	15 - 60 seconds
Phenolic	40 - 80 seconds
Wood (Oak)	>15 minutes
Wood (Pine)	35 - 70 seconds
Chipboard	20 - 80 seconds
Leather	10 - 30 seconds
PC/ABS	25 - 60 seconds
Paper	15 - 40 seconds

\*if stored in proper conditions



**BOSTIK**

**BORN<sup>2</sup>  
BOND™**

**MP-515**

## CURING SPEED VS. TEMPERATURE AND HUMIDITY

The rate of cure depends on the ambient temperature.

The temperature can quicken the curing speed. Born2Bond™ Structural has been designed to be applied at room temperature (23°C +/- 2°C / 73.4°F +/- 3.6°F). Boundary conditions for performance bonding are between 10°C (50°F) and 40°C (140°F), with ideal conditions between 20°C (68°F) and 30°C (86°F).

Humidity can also quicken the curing speed. Boundary conditions for performance bonding are between 30%RH and 70%RH, with ideal conditions between 40%RH and 60%RH.

## BONDING PERFORMANCE

### Lap shear strength (ISO 4587) @ 23°C (73.4°F) (MPa)

After 24 hours curing @ RT

Substrate	Strength (MPa)	Failure Mode
Grit-Blasted Mild Steel (GBMS)	19 +/- 1	
Aluminum (A5754)	12 +/- 1	
ABS	5 +/- 1	SF*
PVC	8 +/- 1	SF*
Phenolic	14 +/- 1	
Polycarbonate	5 +/- 1	SF*

\*Substrate failure

## CHEMICAL/SOLVENT RESISTANCE

Aged under conditions indicated and tested on GBMS.

% of Initial Strength vs. Exposure Time (hours) and vs. Type of Contaminant					
Testing on GBMS	ENVIRONMENT	TEMP	% of Initial Strength		
			100 H	500 H	1000 H
Motor Oil	40°C (104°F)		101	103	96
Gasoline	23°C (73.4°F)		84	70	70
IPA	23°C (73.4°F)		102	87	92
Water	23°C (73.4°F)		86	84	81
Glycol	23°C (73.4°F)		92	85	75
Glycol	80°C (176°F)		62	49	13

## HEAT/HUMIDITY RESISTANCE

Aged under conditions indicated and tested @ 23°C (73,4°F).


% of Initial Strength vs. Exposure Time (hours)			
ENVIRONMENT - 95% RH & 40°C (104°F)	% of Initial Strength		
	100 H	500 H	1000 H
GBMS	65	66	65
Polycarbonate	87	89	74

% of Initial Strength			
ENVIRONMENT - 95% RH & 60°C (140°F)	100 H	500 H	1000 H
Polycarbonate	64	71	71


## HOT STRENGTH

The graph below shows the adhesive performance on grit-blasted, mild steel (GBMS) at various temperatures. The adhesive was cured for one week at 22°C (71.6°F). The lap shear strength was tested according to ISO 4587. The strength test was performed in a climatic chamber that was set up for 30 minutes before testing at the indicated temperatures.

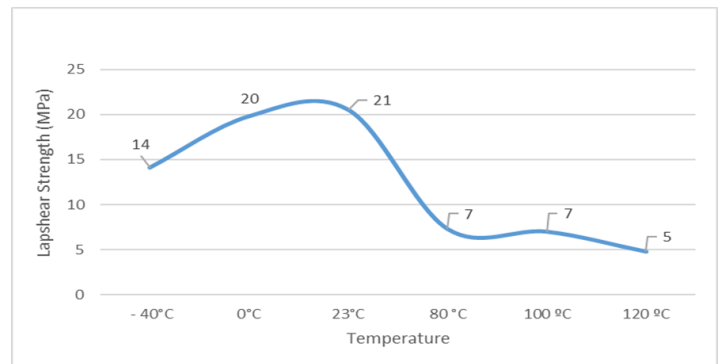

## HEAT AGING

The graph below shows the heat aging results. The adhesive was aged at the temperature indicated, tested at 22°C (71.6°F) and cured for one week. The lap shear strength was tested according to ISO 4587 on grit-blasted, mild steel (GBMS).

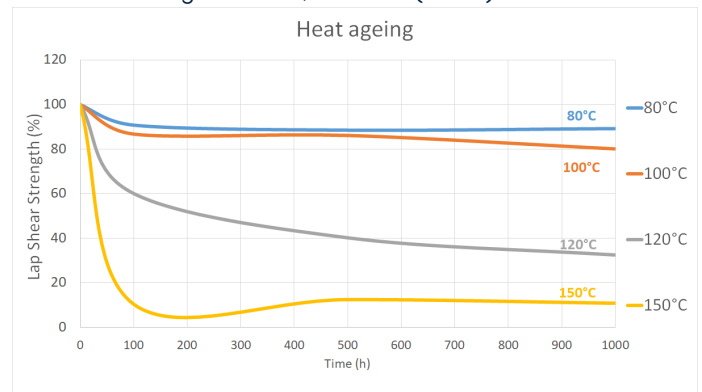



**BOSTIK**

**BORN<sup>2</sup>  
BOND™**

**MP-515**

## **PRODUCT DISCLAIMER**

Bostik offers this Technical Data Sheet ("TDS") for descriptive and informational use only. It is not a warranty, a contract or a substitute for expert or professional advice. Please also see the local product Safety Data Sheet for health and safety considerations.

The statements, technical information, data, and recommendations contained in this TDS are provided 'AS IS' and are not warranted or guaranteed in any way. They represent typical results for the products and are based on Bostik's research only. Since the conditions and methods of use of the products are beyond our control, Bostik expressly disclaims any and all liability and damages of whatever kind or nature that may arise from any use of the products, the results therefrom, or reliance on the information contain herein.

This TDS is one of several tools that may be used to help you find the product best suited for your needs. It is used at your own risk, and by using it, you are knowingly accepting and assuming any and all risks associated with its use and recommendations. BUYERS AND USERS ASSUME ALL RESPONSIBILITY AND LIABILITY FOR ANY AND ALL LOSS OR DAMAGE OF WHATEVER KIND OR NATURE ARISING FROM OR RELATED TO THE HANDLING OR USE OF BOSTIK'S PRODUCTS. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored and/or applied,

and the equipment used for application, among other things. Any change in any of these variables can affect the product's performance. You are responsible to test the suitability of any product in advance for any intended use or application. Bostik does not guarantee the reliability, completeness, use, or function of the statements, technical information, data, and recommendations contained in this TDS. Nothing contained herein constitutes a license to practice under any patent, and it should not be construed as an inducement to infringe any patent. You are advised to take appropriate steps to be sure that any proposed use of the products will not result in patent infringement.

The information provided herein relates only to the specific products designated and may not be applicable when such products are used in combination with other materials or in any process. The product is sold pursuant to a supply agreement and/or Bostik's Terms and Conditions of Sale, which set forth the sole warranty, if any, that applies to the product. **NO OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE OR WARRANTY OF MERCHANTABILITY, IS MADE CONCERNING THE PRODUCTS DESCRIBED OR THE INFORMATION PROVIDED HEREIN, AND TO THE MAXIMUM EXTENT ALLOWED BY LAW, SUCH WARRANTIES ARE HEREBY DISCLAIMED. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW.**