

# SilForce™ SS4195A Release Coating

## Product Description

SilForce\* SS4195A-D1 is a condensation cured primer for SilForce phenyl-based silicone pressure sensitive adhesives (PSAs). It is a toluene solution of curable polyorgano-siloxanes which has been found useful as a primer for high temperature PSA filmstock such as polyester, polyimide, polyetherimide, polytetrafluoroethylene (PTFE), and fluoroethylene propylene (FEP).

## System Components

The SilForce SS4195A-D1 system consists of the following components:

- SilForce SS4195A-D1 polymer
- SilForce SS4191B crosslinker
- SilForce SS4192c catalyst
- SilForce SS4259c cure accelerator

## Typical Physical Properties

Property	Value
Solids, %	30
Solvent	Toluene
Color	Water-Clear
Density, lbs/gal	7.5
Specific Gravity @25°C (77°F)	0.904
Flash Point-PMCC, °C (°F)	4 (40)

Typical properties are average data and are not to be used as or to develop specifications.

## Processing Recommendations

### Test Data

Formulation A was used for the priming of polyester, polyimide, and PTFE films as delineated in Table I, Primed Film Preparations.

**Table I** Primed Film Samples

Sample	Primer	Film Substrate	Meyer Rod
1	SS4195A-D1	Polyester	12
2	SS4195A-D1	Polyimide	8
3	SS4195A-D1	Polyester	12
4	SS4195A-D1	PTFE	12
5	SS4191A	Polyester	12
6	SS4191A	Polyimide	12
7	SS4191A	PTFE	12

Note: Polyester and Polyimid 1mil, PTFE 2 mil thickness Curing conditions: [20sec @130 °C](#)(265 °F)

Two peroxide catalyzed silicone PSA solutions were prepared: PSA518 and PSA610, each catalyzed with 2.0% Benzoyl Peroxide (by weight to the silicone solids). PSA518 is a phenyl-based silicone PSA and PSA610 is a methyl-based silicone PSA. These prepared PSAs were coated onto primed and unprimed polyester, polyimide, and PTFE films to achieve a 1.5 mil dry adhesive coating thickness. Each coated sample was cured for 90 seconds @ 90°C (194°F) (solvent flash), followed by 2 minutes @ 165°C (329°F) (peroxide cure).

Tape samples of the cured silicone PSAs were then evaluated for degree of anchorage by initiating a slit in the tape followed by propagating a tear along its length. The width of the generated adhesive 'web' was then visually estimated using an inch-scale ruler. A poorly anchored PSA tape will generate a wide adhesive layer 'web' due to adhesive delamination along the slit-edges. The success of adhesive anchorage is determined by the primer's ability to prevent slit-edge delamination, thus effectively eliminating adhesive 'web' generation.

Table II summarizes the results of this testing.

The data presented there clearly illustrate the superior performance of SS4195A-D1 in securing the effective anchorage of phenyl-based silicone PSA518 to different industrial tape backings. It should be noted that this primer is specific in use for phenyl-based adhesives such as PSA518 and it provides only marginal anchorage improvement for methyl-based adhesives such as PSA610.


Table II Slit-edge 'Web' Generation (Width, Inches)

Silicone PSA	Film Substrate	Meyer Rod Number	Primer		No Primer
			SS4195A	SS4191A	
PSA518	Polyester	12	1/64	5/8	7/8
PSA518	Polyester	8	1/16	3/4	7/8
PSA518	Polyimide	12	3/8	1 1/2	1 3/4
PSA518	PTFE	12	1/2	2 1/2	4
PSA610	Polyester	12	7/8	1/8	-
PSA610	Polyester	8	1 1/8	3/8	1 1/2
PSA610	Polyimide	12	1 1/4	1/8	2 1/4
PSA610	PTFE	12	2 1/4	5/8	4 1/4

\*All PSA's catalyzed with 2.0% Benzoyl Peroxide (by solids weight), coated onto film at 1.5 mil dry thickness, cured for 90 sec. @95 °C followed by 2 min. @165 °C

Figure1, Generated 'Web' Widths for PSA Tapes, further illustrates this specificity in use. It is interesting to point out that both of these tested primers provided at least some degree of improved anchorage for these tapes, even if not used in direct combination with the specified methyl- or phenyl-based silicone PSA.

Figure1 Generated ' Web' Widths for PSA Tapes

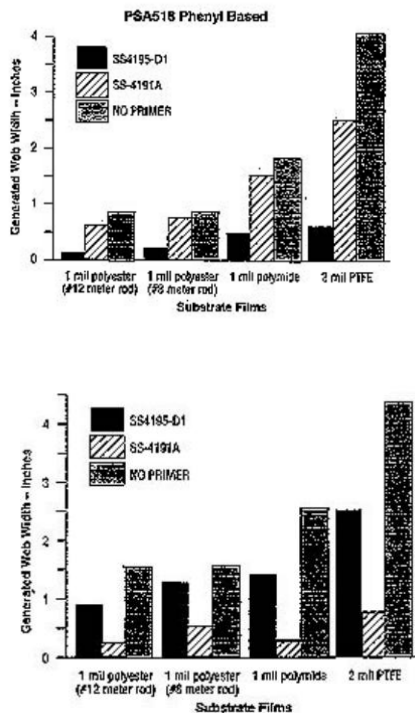

### Preparing the Coating Bath

SS4195A-D1 primer is suggested for use at a bath concentration of 3-5% solids. Meyer rod #8 or #12 may be used for applying the primer to the film. To prepare the catalyzed bath, the following procedure may be useful:

- Weigh SS4195A-D1 in a clean, rust-free container/mixing vessel.
- Add solvent to obtain the desired concentration of SS4195A-D1 and stir until dissolved. Toluene, xylene, naphtha, or aliphatic solvents such as hexane or heptane may be used for dilution.
- Add the SS4191B crosslinker and stir for several minutes.
- Add the SS4259c accelerator and stir for several minutes.
- Add SS4192c catalyst and stir for several more minutes to assure homogeneity.

### TYPICAL FORMULATIONS

The following formulations may be used as starting points to determine the optimum levels of crosslinker, catalyst, and accelerator suitable for SS4195A-D1 primer preparation:

Component	Formulation (parts by weight)	
	A	B
SS4195A-D1	13.3	9.8
SS4191B	0.3	0.2
SS4192c	0.5	0.4
SS4295c	0.5	0.4
Toluene	85.4	90.2

Suggested cure conditions: 20-30 seconds @235°F (112°C)

### Bath Life

Bath life evaluations have indicated that catalyzed SS4195A-D1 primer baths remain suitable to use for up to 12 hours. Bath life will be affected by the temperature of the bath and by the solvent selection. It is recommended that the bath life be determined by performing laboratory tests for specific applications and processing conditions.

### Availability

SS4195A-D1, SS4191B, SS4192c, and SS4259c may be ordered from Momentive Performance Materials, Waterford, NY 12188, the Momentive Performance Materials sales office nearest you or an authorized Momentive Performance Materials distributor.

### General Considerations for Use

NA

### Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

## Product Safety, Handling and Storage

### CAUTION

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe Handling instructions, personal protective equipment, if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any MPM representative. For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

### Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

### Contact Information

Email

[commercial.services@momentive.com](mailto:commercial.services@momentive.com)

#### Telephone

##### Americas

+1 800 295 2392

Toll free\*

+704 805 6946

Direct Number

\*All American countries

##### Latin America

###### Brazil

+55 11 4534 9650

Direct Number

###### Mexico

+52 55 2169 7670

Direct Number

##### EMEAI- Europe, Middle East, Africa & India

###### Europe

+390510924300

Direct number

###### India, Middle East & Africa

+ 91 44 71212207

Direct number\*

\*All Middle Eastern countries, Africa, India, Pakistan, Bangladesh, Sri Lanka.

##### ASIA PACIFIC

###### China

800 820 0202

Toll free

+86 21 3860 4892

Direct number

###### Japan

0120-975-400 Toll free

+81 27620 6182

Direct number

###### Korea

+82 2 6201 4600

Direct number

###### South East Asia, Australia & New Zealand

+60 3 9206 1543

Direct number\*

\*South East Asia countries (Malaysia, Singapore, Thailand, Indonesia, Vietnam, Philippines, Cambodia, Myanmar / other countries located in Pacific region).

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

**DISCLAIMER:**

**THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, SUPPLIER MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.** Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

The use of the "™" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies. Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.



260 Hudson River Road Waterford,  
NY 12188 USA  
[momentive.com](http://momentive.com)

Copyright 2022 Momentive Performance Materials Inc. All rights reserved.