




# H5355

## HOT MELT ADHESIVE

### Foamable Hot Melt Adhesive

**Soft, elastic and light color with excellent foamability. Good wring resistance. Low temperature application.**

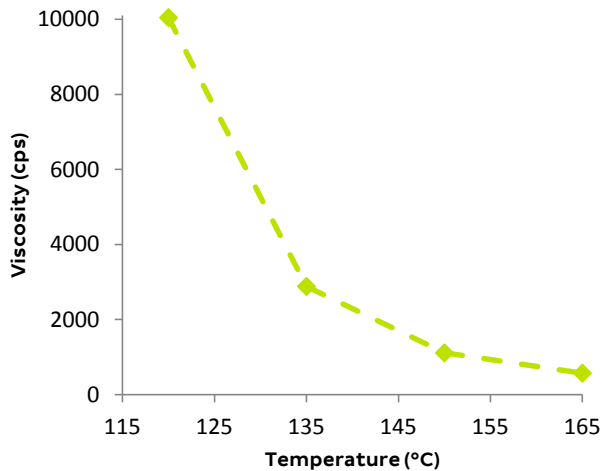

Temperature (°C)	Viscosity (cps)
120	10045
135	2880
150	1110
165	570

For packing options please call your Bostik sales or technical representative.  
Reported data is typical reference values.

Last review: September 12h, 2016  
Version: 0

### Typical technical properties

Color	Light Yellow
Density@25°C	0.98 g/cc
Softening point	96.32°C (205.4°F)
Suggested running temperature	135-150°C (275-302°F)

### Technology

Styrene copolymer based formulation

### Shelf life

365 days

### Storage

Store in a clean dry place at temperature under 40°C. For additional storage requirements, please review the SDS (Safety Data Sheet).

### CONTACT

Smart help 01-800-BOSTIK-7  
(267845)



The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the product, its shelf life, and application characteristics will depend on many variables, including but not limited to the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use under the conditions that will exist at the time of the intended use. Bostik does not warrant the product's suitability for any particular application. The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale. The sole warranty that applies to this product is the limited warranty ("Limited Warranty") set forth in those Terms and Conditions of Sale. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTIES THAT COULD ARISE FROM COURSE OF DEALING OR USAGE OF TRADE. UNLESS OTHERWISE STATED IN TERMS AND CONDITIONS, THE EXCLUSIVE REMEDY FOR BREACH OF WARRANTY IN REPAIR OR REPLACEMENT OF THE AFFECTED PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE OF THE AFFECTED PRODUCT. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES. BUYERS AND USERS ASSUME ALL RESPONSIBILITY AND LIABILITY FOR LOSS OR DAMAGE ARISING FROM HANDLING AND USE OF BOSTIK'S PRODUCTS. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.