

HA1804

Two-component Hybrid & Flexible Adhesive

Product Description

HA1804 is two-component hybrid flexible adhesives with a unique combination of high elongation, high peel and shear strength. It provides a flexible bonding with feature of a wide range of dissimilar materials, including metals, engineering composites, thermoplastics (PMMA, ABS, PA66 and PC), glass, etc. **HA1804** has a working time of approximately 4-5 minutes and achieve a handling strength in approximately 20-25 minutes. It also has other following features:

- Withstand severe thermal shock.
- Good ageing resistance and low moisture absorption.
- Does not contain solvent.
- Be particularly suitable for bonding materials with different CTE.

Product Characteristics

Chemical Class	Hybrid	AL3003/AL3003	9.1/CF
Appearance(mixed)	Black	SMC/SMC	8.2/CF
Viscosity	Moderate	PC/PC	8.3/CF
% Solids by Volume	100	PMMA/PMMA	8.8/CF
Shelf life, mos	6	PA66/PA66	6.5/CF
Service temperature, °C	-40~130	ABS/ABS	8.5/CF
		Glass/Glass	8.2/CF
		Copper/Copper	8.2/CF

Typical Properties of Uncured Materials

Part A	
Appearance	Black
Specific gravity@25 °C	1.02
Viscosity@25 °C, cP	100,000
Part B	
Appearance	White
Specific gravity@25 °C	1.14
Viscosity@25 °C, cP	30,000
Mixed	
Mix ratio, by vol, A to B	100:50
Mix ratio, by wt, A to B	100:55
Working time @ 25°C, mins	4-5
Fixture time @ 25°C, mins	25

Typical Cured Properties

The samples were prepared and cured at 25 °C for 168 hours

Density(cured), g/cm ³	1.07
Hardness, Shore A	83
Tensile strength, MPa	7.5
Elongation at break, %	280

Lap Shear Strength, MPa/Failure Mode

AL/AL	8.0/CF
GS/GS	8.8/CF
NS/NS	9.0/CF
CS/CS	8.7/CF
SS/SS	7.6/CF
AL6061/AL6061	8.3/CF


T-Peel Strength, N/mm/Failure Mode

AL3003/AL3003	13/CF
---------------	-------

Lap Shear Strength at Different Temperatures

The samples were prepared and cured at 25 °C for 168 hours followed by 180 °C for 1 hours, then tested after dwelled at 25 °C for another 4 hours

AL/AL	8.0/CF
-------	--------

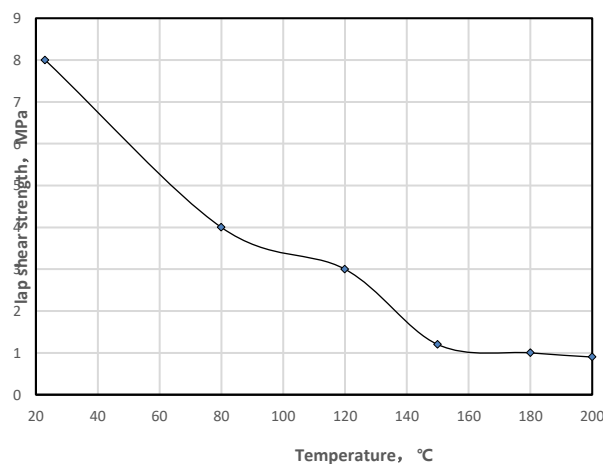

Lap shear strength at different temperatures(AL/AL)

Typical Ageing Resistance Properties

The samples were prepared and cured at 25 °C for 168 hours then test lap shear strength after putting in ageing conditions for 500 hours

Ageing Process (AL/AL)	MPa/Failure Mode
Standard Curing Process	8.0/CF
High Temperature (60°C)	8.5/CF
Thermal Shock (-40-80°C)	8.5/CF

HA1804

Damp Heat (60°C & 95% R.H.)	8.0/CF	(°C x 1.8) + 32 = °F
Salt Mist	8.0/CF	kV/mm x 25.4 = V/mil

TYPICAL CURING PROCESS

Important: The cure of **HA1804** can be affected and accelerated by elevated temperatures, typical curing process recommend as curing for 24 hours @25 °C followed by 4 hours @60 °C.

STRENGTH AFTER AGING

The lap shear strength of bonded aluminum and aluminum will retain ≥ 7 MPa after coupons cured for 168 hours at 25 °C and then aged by thermal shock from -40~80 °C.

PROCESSING

The surfaces must be dry, degreased and dust free. The treatment may be varied according the substrate (solvent, paper sanding, degreasing, Corona treatment, cold plasma, etc.): consult with the technical service.

Mix well until the colors are homogenous (Different colors of A&B are designed to help judgment) with required static mixer. Apply mixed adhesive directly to the surface, then assemble with mating part within recommended working time (2-4 minutes). Apply firm pressure between mating parts to minimize any gap and ensure good contact, and then cure the sample as cure condition describes.

PRECAUTIONS

Please refer to the appropriate material safety data sheet (MSDS) prior to using this product.

STORAGE

The product is sensitive to moisture in the air. Store the unopened product in a cool, dry, well ventilated location away from sources of moisture and heat. Optimal storage temperatures should range between 10 °C (50 °F) and 30 °C (86 °F). Product removed from the containers during use should not be returned to original containers in order to avoid potential contamination.

CONVERSIONS

mm / 25.4 = inches
$\mu\text{m} / 25.4 = \text{mil}$
N x 0.225 = lb
N/mm x 5.71 = lb/in
N/mm ² x 145 = psi
MPa x 145 = psi
N·m x 8.851 = lb·in
N·m x 0.738 = lb·ft
N·mm x 0.142 = oz·in
mPa·s = cP

WARRANTY

ITW will replace any material found to be defective. Because the storage, handling and application of this material are beyond our control, we can accept no liability for the results obtained.

NOTE

The following supersedes any provision in your company's forms, letters and papers. ITW makes NO WARRANTY, WHETHER EXPRESSED OR IMPLIED, and INCLUDING WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE FOR THIS PRODUCT. No statements or recommendations contained in the product literature are to be construed as inducements to infringe any relevant patent, now or thereafter in existence. UNDER NO CIRCUMSTANCES SHALL ITW BE LIABLE FOR INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES FROM ALLEGED NEGLIGENCE BREACH OF WARRANTY, STRICT LIABILITY OR ANY OTHER THEORY, ARISING OUT OF THE USE OR HANDLING OF THIS PRODUCT. The sole liability of ITW for any claims arising out of the manufacture, use or sale of its products shall be to refund the buyer's purchase price, provided such products have been demonstrated in ITW sole opinion, to justify such refund.

For technical assistance, please call: 86-021-54265119

FOR INDUSTRIAL USE ONLY